

Ku-band 8W Block Upconverter

MODEL No. NJT5018 Series

< Features >

- * No “Cooling Fan” Solution
- * High Efficiency Output Power (8W minimum @P1dB over temperature)
- * Three Power Supply Selections
DC: +48Vdc Operation (+38 to +60 Vdc)
- * Option: Separation of power supply port (MS-connector)
- * RoHS Compliance



<Line-Up>




Model No.	RF Frequency	Local Frequency	IF Frequency	Output Power	IF Connector	Power Supply	Port for Voltage Input
NJT5018N00100	14.0 to 14.5 GHz (Ku-band)	13.05 GHz	950 to 1,450 MHz	8W Linear (+39 dBm min.)	N-type	+48Vdc	Same as IF Connector
NJT5018F00100					F-type		
NJT5018N01100					N-type		MS Connector (separate port)
NJT5018F01100					F-type		

< Specifications >


Item	Specifications
Output Interface	Waveguide, WR-75
Output Power @ 1dB G.C.P.	+39 dBm min. over temperature
Linear Gain	59 dB min.
Requirement for External Reference	[Frequency] 10 MHz (sine-wave) [Input Power] -5 to +5 dBm @ Input port [Phase Noise] -125 dBc/Hz max. @ 100 Hz -135 dBc/Hz max. @ 1 kHz -140 dBc/Hz max. @ 10 kHz
L.O. Phase Noise	-60 dBc/Hz max. @ 100 Hz -70 dBc/Hz max. @ 1 kHz -80 dBc/Hz max. @ 10 kHz -90 dBc/Hz max. @ 100 kHz
Input V.S.W.R.	2 : 1 max
Output V.S.W.R.	2 : 1 max.
Power Requirement	+48 VDC (+38 to +60 VDC), 170 W max.
Mute	Shut off the HPA in case of L.O. unlocked
Input Interface	N-type, female (50 ohms) [Model No. NJT5018N****] F-type, female (75 ohms) [Model No. NJT5018F****]
Temperature Range (ambient)	-40 to +55 C (operating) -40 to +75 C (storage)
Dimension & Housing	275mm (L) x 246mm (W) x 135 mm (H) [10.8" (L) x 9.7" (W) x 5.3" (H)]
Weight	20.5 lbs max. [9.3 kg max.]

[CLICK HERE to buy now](#)

< Outline Drawing >

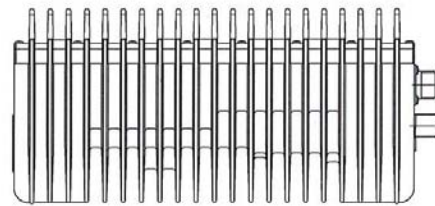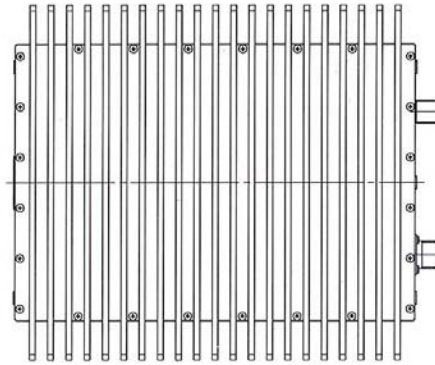

Tolerance ±0.5
UNIT: mm

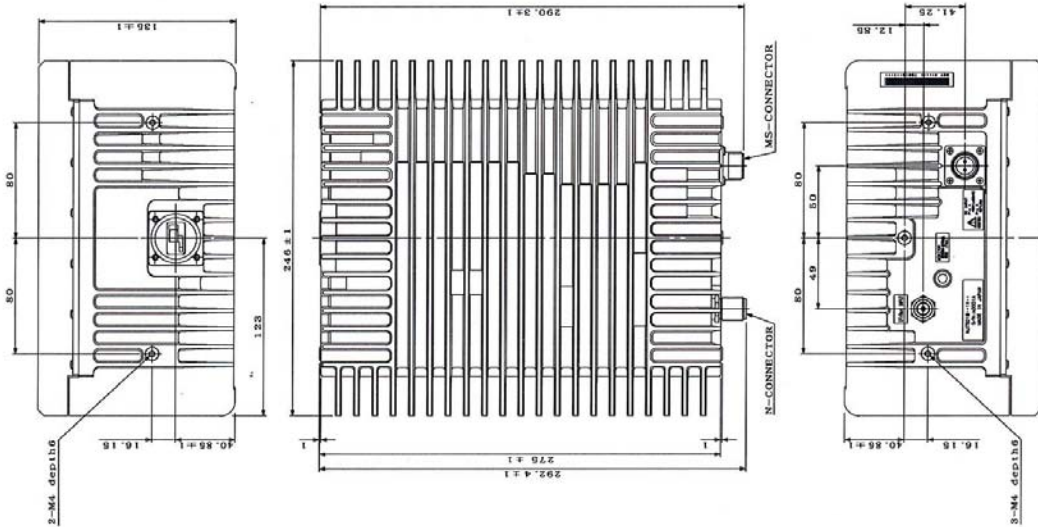

JRC *New Japan Radio Co., Ltd.*

Satcom Resources

Post Office Box 1639
101 Eagle Road - Building #7
Avon, Colorado 81620 USA
970 748-3094 or tollfree 866 SATCOM1
Fax 970 748-3096
www.satcomresources.com