



Description

The RF7 Series X-Band LNA offers premium performance and reliability in the most versatile package available for a X-Band LNA.

The latest technology in GaAs HEMT devices produces the lowest possible noise temperatures in an uncooled LNA. In addition, the RF7 Series LNA is backed by a 36-month warranty and by more than 30 years experience in the design of high performance communications amplifiers.

The performance of the RF7 Series LNA is matched by a full range of features chosen with the communication system designer in mind.

From the compact weatherproof housing to the standard combination of RF cable and circular connector DC input, the RF7 Series LNA is ready for integration into your system.

FEATURES

- Noise Temperatures as low as 45K
- Embedded interstage Tx reject filter
- 36-Month Warranty
- Input and Output Isolators
- +12 to +28 VDC Operation
- Cable Power Standard in addition to the DC Connector
- Waterproof, Painted Aluminum Housing
- Voltage Surge Protection
- Reverse Voltage Protection
- Pressurizable Feed

OPTIONS

- Universal AC Power Supply
- Fault Alarm (Current Sensing)

SPECIFICATIONS

- 1:1 Redundant LNA System
- 1:2 Redundant LNA System



Post Office Box 1639
101 Eagle Road - Building #7
Avon, Colorado 81620 USA
970 748-3094 or tollfree 866 SATCOM1
Fax 970 748-3096
www.satcomresources.com

Electrical

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range		7.250 to 7.750	GHz
Noise Temperature	(see ordering information)	45 to 70	K @ +23 °C ambient
Gain	50 dB optional (see ordering information)	60 (min.)	dB
Gain Flatness	Full band /40MHz	±0.50 (max.)	dB
Gain Slope	/40MHz	±0.20 (max.)	dB
Gain Stability vs. Time		0.012 (max.)	dB/MHz
		±0.10 (max.)	dB/hour
		±0.20 (max.)	dB/24 hours
		±0.20 (max.)	dB/month
Output Power @ 1dB Gain Compression (P _{1dB})		+10	dBm
Output Third Order Intercept Point	Measured with two tone input; each tone @ -65 dBm input	+20	dBm
Input/Output VSWR		1.25:1(max.)	
Input Overdrive	(maximum level)	0	dBm CW
Out-of-Band Susceptibility	Amplifier will tolerate while remaining specification-compliant	-30 (max)	dBm CW input; in 7.9 to 8.4 GHz band
Group Delay	/40 MHz		
Linear		0.05	ns/MHz
Parabolic		0.005	ns/MHz ²
Ripple		1.0	ns peak-to-peak
AM/PM Conversion	@ -10 dBm output power	0.05 (max.)	°/dB
Primary Power	(see ordering information for available options)		
Voltage	(+ 15 VDC for fault option)	+12 to +28	VDC
Current		185 (typical)	mA
Optional AC Power Supply	Contact factory for mechanical outline drawing	100 - 240 47 - 440	VAC Hz

Mechanical

Size	width X length X height	3.38 X 10.70 X 1.93 86 X 272 X 49	in. mm.
Weight		3	lbs.
Finish		Paint	White; epoxy enamel
Feed Pressure		2	PSI
Connectors	RF Input RF Output (standard) RF Output (option) DC/Fault (option)	WR112 Waveguide ¹ SMA Type N ² 6-pin MS ² 6-pin MS mate	CPR112G flange Female Female MS3112E10-6P MS3116F10-6S

¹ Use supplied full (for mating with a grooved flange) or half (for mating with a flat flange) gasket to ensure a weatherproof seal.

² Cover connectors with electrical putty or tape to ensure a weatherproof seal.

Environmental


Operating Temperature	Ambient	-40 to +60	°C
Storage Temperature	Ambient	-40 to +70	°C
Relative Humidity	Condensing	100	%

Specifications are subject to change.

TECHNICAL NOTES

Gain vs. Ambient Temperature Coefficient	-0.04 dB/°C for Units with 50 dB Gain -0.05 dB/°C for Units with 60 - 75 dB Gain
Noise Temperature vs. Ambient Temperature	Derate noise temperature by 0.33K/°C for ambient temperatures over +23 °C

OUTLINE DRAWING

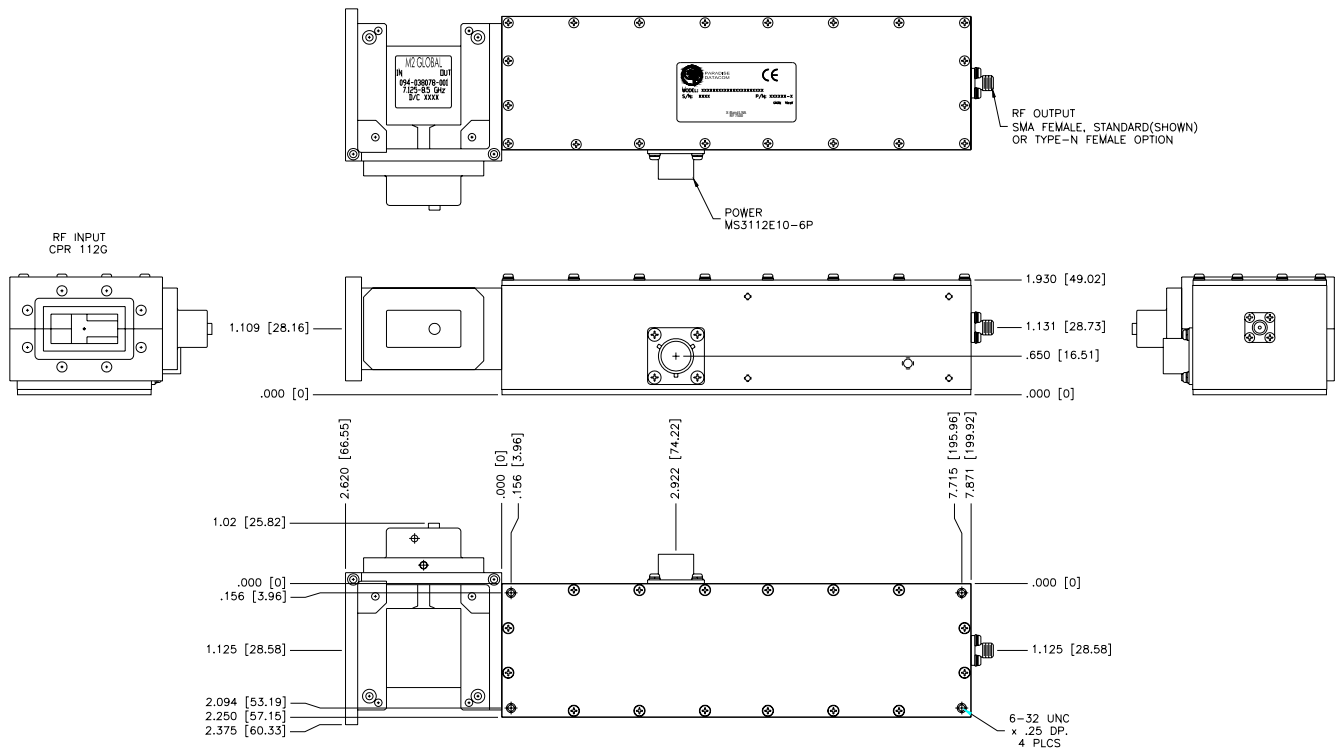

DC POWERED UNITS

PRIME POWER / ALARM INTERFACE

PIN	STANDARD	-48VDC POWER Option A3	ALARM Option F1	AC POWER Option A1	ALARM / AC POWER Option A1F1
A	+12 to +28 VDC	-18 to -64 VDC	+15 to +28 VDC	100 to 240 VAC LINE	100 to 240 VAC LINE
B	GROUND	-18 to -64 VDC RTN	GROUND	AC GROUND	AC GROUND
C	GROUND	GROUND	GROUND	100 to 240 VAC RTN.	100 to 240 VAC RTN.
D	NC	NC	OPEN ON FAULT	NC	OPEN ON FAULT
E	NC	NC	COMMON	NC	COMMON
F	NC	NC	CLOSED ON FAULT	NC	CLOSED ON FAULT

X-Band LNA Configurator

R	F	7									

Noise Temperature (K)
 45 55 65
 50 60 70

Gain (dB)
 50 SP=Custom
 60

Input Voltage
 XX - +12 to +28 VDC*
 A1 - 100-240 VAC, 47-440 Hz
 A3 - -18 to -64 VDC
 *+15 to +28 VDC with option F1

Special Notes
 XX - None (SMA(f) RF Output)
 XN - Type N(f) Output
 CP - Cable Power (with MS Connector power entry) with Type N(f) RF Output
 CR - Cable Power (w/o MS Connector power entry) with Type N(f) RF Output

Fault Alarm
 XX - None
 F1 - Contact Closure (Dry form "C")
 (Requires +15 to +18 VDC)



Post Office Box 1639
 101 Eagle Road - Building #7
 Avon, Colorado 81620 USA
 970 748-3094 or tollfree 866 SATCOM1
 Fax 970 748-3096
 www.satcomresources.com